

## GL5060XR

### 16+4 Port Industrial Managed (PoE) L3 Switch with 10G Uplink

**The GL5060XR Industrial Ethernet L3 Switches from Actelis Networks® are high density hardened, fanless fiber fed switches able to support four 10G interfaces and up to 16 high speed gigabit interfaces per device with optional PoE capabilities.**

The GL5060XR is part of Actelis' DIN Rail family of access switching products designed for industrial, intelligent traffic network, surveillance, pipeline and utility applications. The GL5060XR family are cost optimized, managed 10G switches supporting multiple ten and one gigabit Ethernet connections that allow multiple sensors or cameras at various locations to be connected in a linear chain, MSTP/RSTP/STP mesh or Fast healing ERPS ring configurations.

The GL5060XR family offer wire-speed switching across 20 ports, featuring an extremely small factor, fanless design, and DIN rail mounting, the GL5060XR family is ideal for deployment in almost any traffic, utility, or industrial networks.

The GL5060XR-16J4F-P supports 16 PoE (Power over Ethernet) ports with a maximum of 30W per port (802.3af and 802.3at).

The GL5060XR family also supports L3 functionality including Static Routing, RIP, OSPF and VRRP.

Environmentally hardened with redundant power inputs, and featuring a robust, field-proven design, the unit is protected against over voltage and over current conditions, ensuring high reliability and trouble-free operation.

Interoperable with any standard Ethernet switch, router or hub GL5060XR devices seamlessly integrate into any Ethernet network. Equipped with four 1/10G Small Form-Factor Pluggable (SFP/SFP+) uplinks and 16x 10/100/1000Base-T copper RJ45 ports, the GL5060XR allows assignment of a service/device per port.


GL5060XR incorporates comprehensive set of mechanisms that include high level authentication, advanced encryption capabilities, as well as sophisticated filtering and access control using layer 2 processes.

The GL5060XR provides 802.1q VLAN-aware wire-speed bridging, double tagging (VLAN stacking) for end-user VLAN transparency, L2 (Ethernet priority) classification with eight queues per port, fast healing rings, MSTP/RSTP/STP, Dynamic Link Aggregation, bandwidth monitoring, Multicast/Broadcast limiting, as well as IGMP bandwidth snooping for video distribution applications.

The GL5060XR can be managed through Actelis' MetaASSIST EMS multi-platform Element Management System\*. Various user interfaces/protocols are supported including a WEB based GUI, Cisco Like CLI as well as SNMP MIBs enabling seamless integration with third-party Network Management Systems (NMS).

#### Highlights

- **High Density Managed** 10G switch – 20 ports
- **Industrial Design** - Harsh environments, wide temperature range compact IP30
- **Optional PoE** (Power over Ethernet) ports
- **Flexible Network Redundancy** - RSTP, MSTP, ERPS, LACP
- **Advanced Traffic Management** - QoS- CoS, DSCP, WRR/SPQ Queuing, Storm Protection
- **L2 wire speed switching** , 9K Jumbo frames
- **L3 Routing capabilities** - RIP, OSPF, VRRP
- **Multicasting** - IGMP Snooping - v1/v2/v3, up to 512 groups
- **Advanced Security:** IEEE 802.1x, RADIUS & TACACS+
- **SNMP** v1/v2c/v3
- **Easy Deployment / Configuration** - USB storage, configuration-free replacement
- **Industrial automation protocols** Ethernet/IP and Modbus TCP
- **Superior Reliability and Availability**

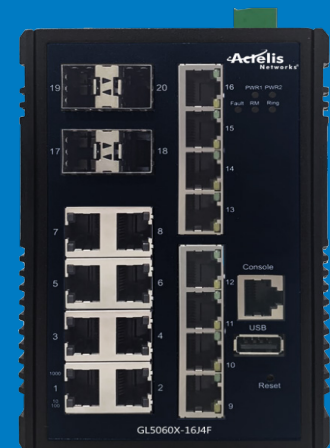

## GL5060XR

### Specifications

#### Interfaces

Ethernet (Network/User) -

- 10/100/1000Base-T: 16 ports
- IEEE 802.3, 802.3u, 802.3ab, 802.3az

Connector: RJ45, Auto-MDI/MDI-X

PoE (not on GL5060XR-16J4F model):  
GL5060XR-16J4F-P: 16x 30W (802.3af or 802.3at)

- 1/10G Base-X: 4 ports

IEEE 802.3ae

Connector: SFP/SFP+, MSA compliant

Management (out-of-band)

- Console/Craft: RS-232  
Connector: RJ-45
- Storage- Firmware update, configuration backup, restore, boot up and syslog  
Connector: USB 2.0

Alarm Contacts

- Terminal Block, 1 input, 1 output

#### LAN Protocols

- Ethernet operating mode: Store & forward, L2 wire-speed/non-blocking
- Switching Fabric: 112Gbps
- MAC addresses: 16K
- Jumbo frames: 9K Bytes
- Flow control: IEEE 802.3x (Full Duplex) and Back-Pressure(Half Duplex)
- Max VLANs: 4094
- VLAN Types: Port-based VLANs
- VLAN Tagging: IEEE 802.1Q
- Double Tagging: Q-in-Q IEEE 802.1ad
- Multicast: IGMP snooping V1/V2/V3 up to 512 multicast groups, IGMP Querier
- Discovery Mechanisms: LLDP IEEE 802.1ab

#### Traffic Management and QoS

- Priority IEEE 802.1p QoS
- Queues per port: 8
- Traffic Shaper: port-based shaping
- Scheduler: SPQ, WRR

#### Redundancy

- Ring: ERPSv2
- Spanning Tree Protocol: STP - IEEE 802.1D, RSTP IEEE 802.1w, MSTP IEEE 802.1s
- Link Aggregation with LACP Static or Dynamic

#### Security Protocols

- Port security: IP and MAC-based access control
- Authentication: IEEE 802.1X
- Storm Control: Multicast/Broadcast/Flooding Storm Control

#### Management Protocols

Support for IPv4 and IPv6 management

Support for TCP and UDP protocols

User Management interfaces

- Command line interface: Cisco-like CLI
- WEB-GUI
- SNMP: V3, V2C, V1
- Telnet

Secure Access

- HTTPS, SSH, SSL, Radius, TACACS+

Configuration

- TFTP, USB

Diagnostic Syslog

- Per VLAN mirroring

DHCP

- Client, Server, Snooping, Relay Agent with option Option 82

Time Sync

- NTP
- IEEE1588v2 OC (Software Timestamp)
- TC (Hardware Timestamp)

Port Trunk with LACP:

Static or Dynamic

#### Management Applications

- EMS: MetaASSIST EMS\*

#### L3 Protocols

- Static Routing
- RIP v1/v2
- OSPF v2
- VRRPv2

#### Physical

- Dimensions :  
Height: 5.7" / 145 mm,  
Depth: 4.6" / 118 mm, Width: 3.6" / 91 mm
- Weight: 2.2-3 lbs / 1-1.4 kg (model dependant)
- Mounting: Din Rails, Wall mounting (Optional)

#### Power

- Dual DC (integrated): 12-48VDC, 48-57VDC for PoE
- PoE 240W (not on GL5060XR-16J4F model)

#### Environmental

- Operating Temp. -40° to +75°C
- Storage Temp. -40° to +85°C
- Relative humidity: Up to 95%, non condensing

#### Regulatory Compliance/Certifications

Safety

- IEC62368, UL62368

EMC

- CE EN 55032 Class A, FCC Part 15
- IEC61000-4-2, -3, -4, -5, -6, -8
- EN 50121-4

CE

- EMC and Safety

Vibration, shock & freefall

- IEC68-2-6, -27, -32

RoHS and WEEE

- RoHS (Pb free) and WEEE compliant



Corporate Headquarters  
Actelis Networks, Inc.  
47800 Westinghouse Drive  
Fremont, CA 94539  
t. +1 510-545-1045 or toll-free in U.S. 1-866-ACTELIS

Company and General Information: [info@actelis.com](mailto:info@actelis.com)

Asia Pacific Sales: [apacsales@actelis.com](mailto:apacsales@actelis.com)

Central and Latin America Sales: [calasales@actelis.com](mailto:calasales@actelis.com)

Europe, Middle East and Africa Sales: [emeasales@actelis.com](mailto:emeasales@actelis.com)

North America Sales: [nasales@actelis.com](mailto:nasales@actelis.com)